



TECHNICAL SHEET

OPERATIONAL DATA

FT NAP-16 - 1575
Elaboration date: 01/14/2023
Revision: 05/24/2025-03



NAP-16 AUTOMATIC SPRAY GUN

Reference 1575

DESCRIPTION

It operates at pressures up to 3,920 PSI.

Featuring a ceramic needle, offering high durability.

Opportunity to work in series.

CHARACTERISTICS

Quick activation.

Versatile attachment point.


Stainless steel front panel.



POSSIBILITY OF WORKING IN SERIES

Stainless steel front panel

1/4 INLET

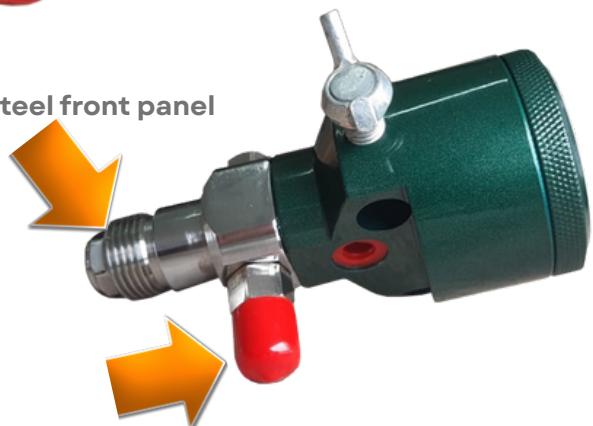

INDICATIONS FOR USE

Suitable for painting applications with industrial, synthetic, acrylic, PU, lacquer paints, etc.

	HEIGHT	LENGTH	WIDTH
PACKAGING MEASUREMENTS	11cm	14cm	8cm

ADDITIONAL DATA

MAXIMUM PRESSURE	3.920 PSI
NOZZLE HOLDER THREAD	7/8"
INLET THREAD	1/4
GROSS WEIGHT	0,545kg
COMPRESSOR INDICATION	7 bar/10 feet flow rate



Assembled in Brazil



CREA-SC
Record 172951-7



Email
atendimento@nauber.com.br



Telephone
+55 47 33745969



Web Site
www.nauber.com.br